



POWER-OUT ALERT™

Electronic Power Loss Monitor

This Package Contains:

- 1 PS-110
- 1 Product Guide

Features:

- Detect power loss by plugging into a standard outlet
- Connects to most hardwire or wireless alarm systems
- 3 to 8 minutes power interruption closes the dry contact
- Built in delay of 3 to 8 minutes to avoid nuisance alarms
- Do not put the PS-110 device into a cooler/freezer environment

Note:

- The Power-Out Alert™ contact is Normally Open ("N.O."). Once power is lost for 3 to 8 minutes the circuit is Normally Closed ("N.C.").
- Once power is restored the contact will take 3 to 8 minutes to restore back to N.O.
- Test device weekly to ensure proper operation.

Specifications:

Application	Standard two blade 120V AC outlet
Contact Rating	500mA at 30V DC/AC
Time Delay	3 to 8 minutes, not adjustable
Operating Range	40 to 100 °F (4.4 to 37.8 °C) non-condensing environment Indoor use only
Weight	9.3oz (263.7g)
Dimensions	2.25" x 2.0" x 3.0" (5.7cm x 5.1cm x 7.6cm)
Mounting	Standard eyelet and included mounting screw




Tech Support 8:00am - 5:00pm Central Time
(800) 635-4269 • 507-625-7231
techsupport@winland.com
www.winland.com



ps-110.winland.com
D-075-0600 REV B (12/2023)

This compact, easy-to-use device plugs into any standard 2-prong 120V AC outlet that requires monitoring. It has an attached 15' (4.57m) cable that wires into remote warning devices such as alarm systems or other emergency equipment.

When power to the monitored circuit is interrupted for more than 3 to 8 consecutive minutes, the PS-110 activates alarms through a dry contact output. This time delay feature means that short power outages (<3 minutes duration) will not cause the PS-110 to activate. As long as electrical power is restored within 3 minutes to the circuit which the PS-110 is monitoring, the unit will automatically reset itself to a normal condition. Several PS-110s can be wired into a single warning system, making power failure monitoring for an entire complex easy.

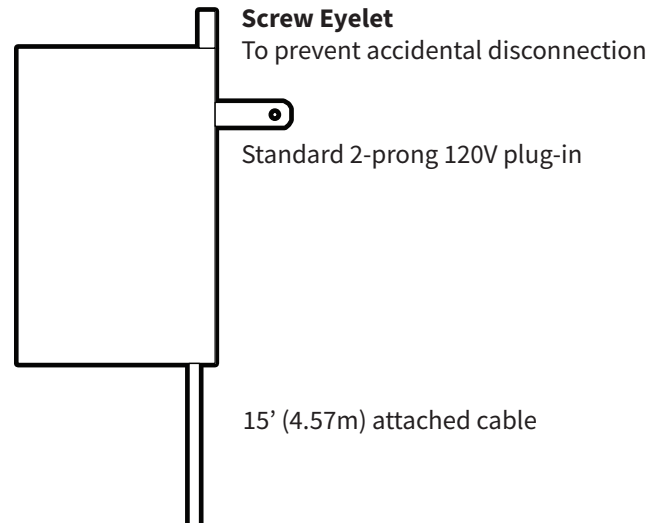

INSTALLATION:

A standard screwdriver is all you need to install the PS-110.

STEP 1:

Disconnect AC Power

To prevent possible injury, shut off electrical power to the circuit by turning off the circuit breaker or removing the circuit fuse.

STEP 2:

Mounting

Plug the PS-110 into a working 2-prong 120V electrical outlet (this should not be controlled by a wall switch). Remove screw from the center of the outlet's faceplate and attach the PS-110 with the eyelet and screw.

STEP 3:

Connecting Power-Out Alert™

Connect sensor wires to the remote device being used to receive the warning signal from the PS-110.

STEP 4:

Restore Power to the Circuit

Restore electrical power to the circuit by turning the circuit breaker back on or by replacing the fuse. Wait approximately 15 minutes for the sensor to become operational before continuing. (The time delay will vary depending on the ambient room temperature).

STEP 5:

Testing (Test device weekly to ensure proper operation)

Manually activate the sensor for testing by interrupting the electrical power to the circuit by turning off the circuit breaker or by removing the fuse for 3 to 8 minutes. Within 3 to 8 minutes of the loss of power, the PS-110 will activate your remote device.

WARRANTY AND SERVICE INFORMATION

Winland Electronics, Inc. ("Winland") warrants to the original purchaser from Winland that each product of Winland's that it manufactures shall be free from defects in material and factory workmanship for a period of one (1) year from the date of purchase, when properly installed and operated under normal conditions according to Winland's instruction.

Winland's obligation under this limited warranty is limited to correcting the product without charge, at its factory any part or parts thereof which are returned, transportation charges prepaid, to the factory within one year of the date of purchase subject to Winland's examination showing to Winland's satisfaction to be covered by this warranty.

Product returns will not be accepted unless a Return Material Authorization has been issued by Winland, which is subject to purchaser's identification of the purchase order number and product serial number. UNAUTHORIZED RETURN SHIPMENT OR SHIPMENT CONTRARY TO WINLAND'S WRITTEN INSTRUCTIONS WILL VOID THIS LIMITED WARRANTY. Correction of such defects by repair, replacement, or refund of the amount paid for the product, at Winland's option, shall constitute fulfillment of all Winland's obligations under this limited warranty. Repaired and replacement parts will be warranted for the remainder of the original product warranty. Repairs not covered by this limited warranty may be offered by Winland for a charge.

This limited warranty shall not apply to any of Winland's products which have been subject to misuse, negligence, accident, or which have been repaired or altered outside of Winland's factory.

THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSES, NON-INFRINGEMENT, DESIGN, AND TITLE, AND ANY WARRANTIES ARISING FROM COURSE OF DEALING, USAGE OF TRADE OR OTHERWISE. ALL OTHER REPRESENTATIONS MADE TO THE END USER/PURCHASER BY ANY OTHER PARTY ARE EXCLUDED. No person, agent or dealer is authorized to give warranties on behalf of Winland nor to assume for Winland any other liability in connection with any Winland product.

WINLAND SHALL NOT BE LIABLE TO ANY PERSON FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY DESCRIPTION, WHETHER ARISING OUT OF WARRANTY OR OTHER CONTRACT, NEGLIGENCE, OTHER TORT, STRICT LIABILITY OR OTHERWISE. Under no circumstances shall Winland's liability under this limited warranty exceed the purchase price paid by the end user/purchaser for the product. The parties agree that the limitation of remedies in this document is an agreed upon allocation of risk and does not cause the remedy to fail of its essential purpose.