



# WATERBUG® 350

**Model Number: WB350**

**Item Number: 1047**


**Includes one unsupervised water surface sensor (W-S-U)**

*\*W-S-U not in product photo*



## Features:

- Utilizes 9V battery for stand-alone operation (battery not included)
- Internal audible alarm
- Integrated buzzer alarms on water presence and low battery
- Connect up to six sensors wired in parallel up to 100' (30.48m) using 18-22 AWG twisted pair
- Monitors for the presence of water (distilled and deionized water cannot be detected)
- Will not alarm due to condensation or humidity
- Open collector output
- Do **NOT** put device into a cooler/freezer environment. The W-S-U may be placed into a cooler/freezer environment.
- Consider additional accessories
  - W-S-U

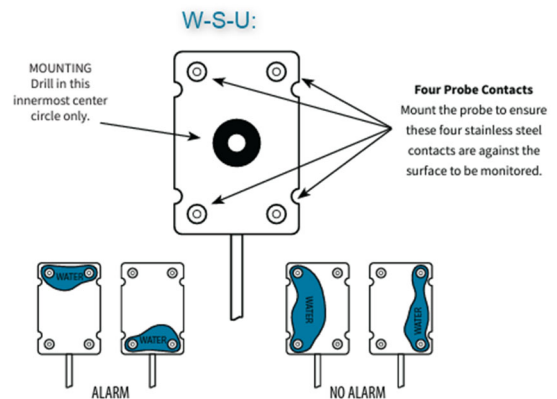

## Specifications:

Current Draw	9V DC via alkaline battery @ 40mA
Device Operating Temperature Range	32 to 140 °F (0 to 60 °C) in a non-condensing environment For indoor use only
Output	Open collector transistor output (Normally Open(N.O.) circuit only) 30V DC max to trip line; 25mA max to collector
Sensor (external)	Includes 1 unsupervised surface sensor (W-S-U) W-S-U may be placed into a condensing environment
Max Sensor/Device Distance	1 to 6 sensors with max distance of 100' (30.48m) each
Device Dimensions	5.0" x 2.44" x 1.25" (12.7cm x 6.2cm x 3.2cm)
Sensor Dimensions	3.0" x 2.0" x 0.88" (7.6cm x 5.1cm x 2.2cm)
Weight	14oz (396.9g)
Mounting	Key slot

